




47 WATT RECESSED LED FIXTURE
LOW PROFILE CEILING LIGHT

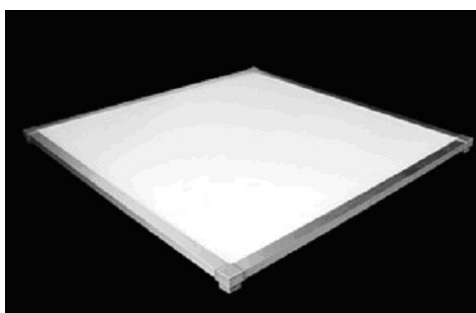

LED quantity:	150
Light Color:	Warm – Day White
Color Temperature:	3000 – 6000 K
Lens:	Tempered Glass
Operating Voltage A/C:	110 – 277
Frequency:	50HZ – 60HZ
Operating Temperature:	-30°F to + 160°F
CRI:	>80
Total Current/Power used:	0.40 Amps
Optical Power:	47 Watts
Power Efficiency:	>0.95
Surface Brightness:	23,200 Lux
Luminous Flux:	2,320 Lm
Electrical Standard:	RoHS, CE
Beam Angle of Each LED:	150°
Lifetime of Lamp:	50,000 hours +
IP:	50
Fixture Dimensions:	2' X 2' X 1.5" height
External Power Driver:	3.75" X 1.75" X 0.75"
Weight:	13 pounds

Installation Instructions: Fixture should be mounted by a certified electrician or a professional electrical maintenance contractor or person with working knowledge of installing & maintaining this type of light. As with any electrical fixture, the power source should be off while installation is performed and follow all state and local electrical codes accordingly. . All Bravolight products are CE & RoHS certified. **May/2010** **(BVO1-REC-47W-LPROFILE)**

